



Single twist and electro-welded mesh gates

Single and double leaf gates

Single twist and electro-welded mesh gates suitable for private lands or plots. A highly functional and easy-to-install gate.



Collective properties



Individual properties



Agricultural areas

Product with quality certification



Sistema de Gestión
ISO 9001:2015
www.tuv.com
@ 110000465

PRODUCT DETAILS

Gates made with a $\varnothing 48 \times 1.5$ mm tube frame and $\varnothing 70$ posts for gates up to 4 metres wide and $\varnothing 100$ mm for gates from 5 metres wide.


The central horizontal crossbeam is made of a 40×20 mm oval tube.

The single twist mesh gates are made of 50×15 mesh.


The electro-welded mesh gates are made of $100 \times 50 \times 4$ mm mesh.

Barbed wire gates are also an option.

Openings

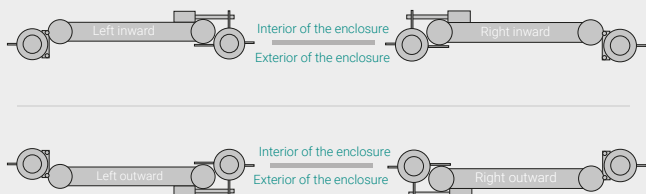

Standard gates are supplied with right-opening when viewed from the outside of the enclosure. They can be made with left-opening upon request.

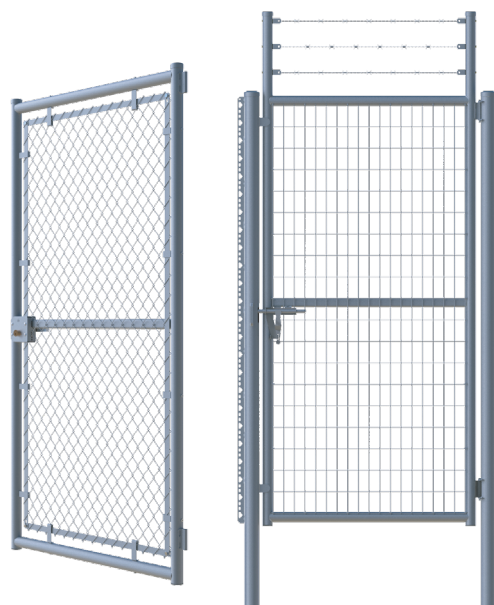



Finishes available in stock:

Galvanising

Moss green 6005



Technical information of the single leaf, single twist and electro-welded mesh gates

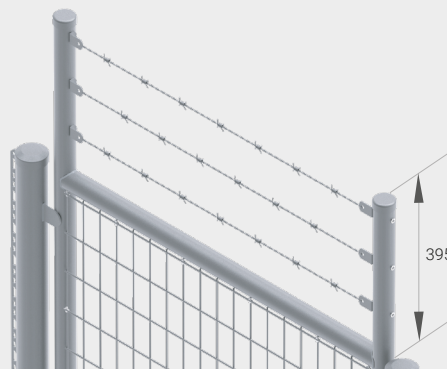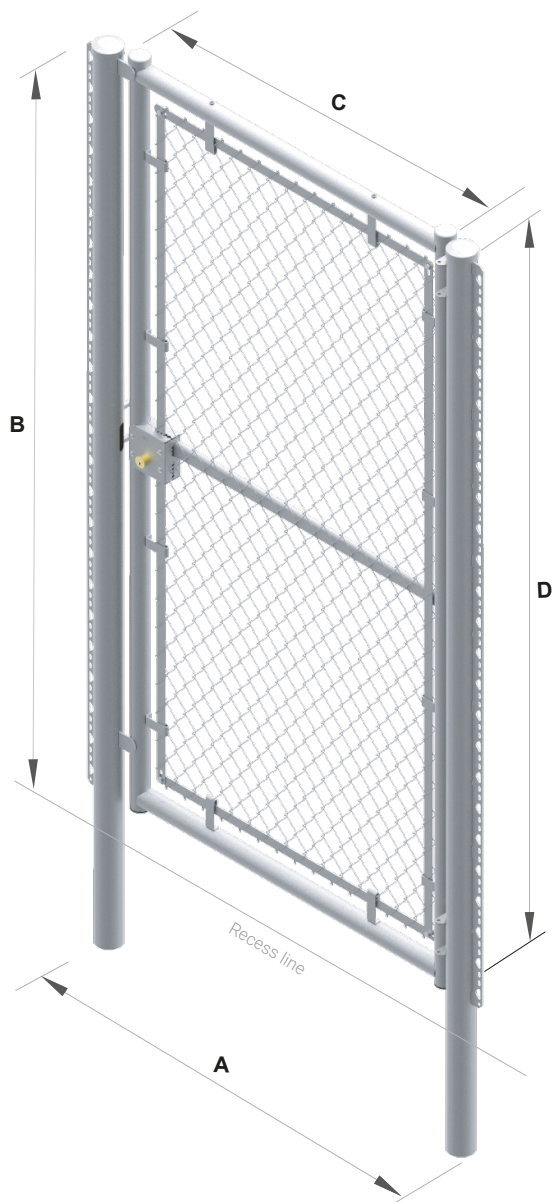

Barbed wire
Close-up of the leaf with barbed wire.




Lock
Close-up of the single twist gate lock



Hinge
Close-up of the leaf hinge, pillar and 30 x 3 mm multi-purpose plate. Both exterior and interior openings are possible


Technical specifications of the single leaf	
Total dimensions of the installed gate (A x B)	Leaf measurements (C x D)
1230 x 1051	991 x 986
1230 x 1551	991 x 1486
1230 x 2051	991 x 1986
1730 x 1051	1491 x 986
1730 x 1551	1491 x 1486
1730 x 2051	1491 x 1986
2230 x 1051	1986 x 986
2230 x 1551	1986 x 1486
2230 x 2051	1986 x 1986




Technical information of the double leaf, single twist and electro-welded mesh gates

Technical data of the single and double leaf gates

- Ø 70 mm pillars up to 4190 leaf width
- Ø 100 mm pillars from 5250 leaf width
- 30 x 3 mm pillar starting plate
- Ø 48 x 1.50 mm frame
- 40 x 20 mm central oval crossbeam
- 25 x 2.5 mm plate of the interior frame
- 50 x 15 single twist mesh
- 100 x 50 x 4 mm electro-welded mesh

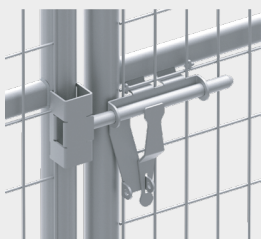

IT bolt
Close-up of the bolt and striker



IT ground latch
Close-up of the ground latch

Technical specifications of the double leaf

Total dimensions of the installed gate (A x B)	Leaf measurements (C x D)
3250 x 1551	3002 x 1486
3250 x 2051	3002 x 1986
4250 x 1551	4002 x 1486
4250 x 2051	4002 x 1986
5310 x 1551	5002 x 1486
5310 x 2051	5002 x 1986
6310 x 1551	6002 x 1486
6310 x 2051	6002 x 1986

Dimension A includes the pillar's multi-purpose plate.

