

Swimming pool enclosure

Swimming pool enclosure with bars and gate





Product with quality certification



Specifications of the swimming pool enclosure

Modular enclosure designed to act as a protection system and prevent access to the pool by children under 5 years of age. It can be manufactured with Ø 25 x 1.5 mm round bars. Ø 60 x 1.5 mm pillars for recessing or with CEEN plate and bracket clamps.

The door is manufactured with a 40 x 40 x 1.5 mm tubular frame and safety fittings that specifically comply with AFNOR standards. Featuring a TWIST 40 lock with a dual-action mechanism to operate the opening, only one adult can open the gate. SWING 40 spring hinge with closing regulator.

Surface finishing



Steel + galvanising + plasticising



Steel + Sendzmir galvanising + primer + plasticising



IT PINT ULTRA

Steel + hot-dip galvanising + primer + plasticising










Example of special textured RAL colors



All finishes have a nanotechnological passivation layer between the steel and the primer or plasticiser.


Any colour from the RAL chart.



www.indusmetaltorres.com



Technical specifications of the swimming pool enclosure

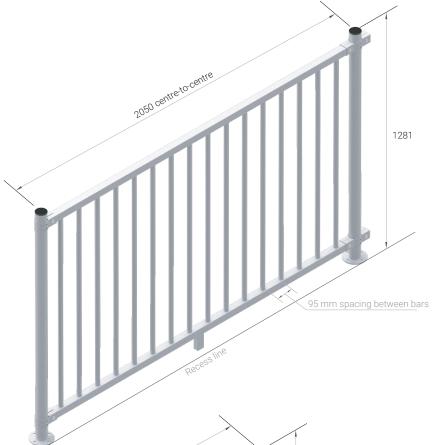

Upper crossbeam: 40 x 40 x 1,5 mm Lower crossbeam: 40 x 40 x 1,5 mm Bars: Ø 25 x 1,5

Pillars: Ø 60 x 1,5 mm



Upper crossbeam: 40 x 40 x 1,5 mm Lower crossbeam: 40 x 40 x 1,5 mm Upright posts: 40 x 40 x 1,5 mm Bars: Ø 25 x 1,5 Pillars: Ø 60 x 1,5 mm Lock: Twist 40 LOCINOX. Latch plate: STRQ LOCINOX. Hinges: SWING 40 LOCINOX





Close-up of the lock LOCINOX. TWIST 40



Close-up of the spring hinge LOCINOX. SWING 40