



IT FR14 30.20 panel

IT FR14 bars enclosure

IT FR14 30.20 panel. 30 x 20 mm rectangular bars enclosure. Ideal for residential and industrial enclosures or public areas.



Individual properties



Collective properties



Parks and gardens



Industrial areas

Product with quality certification



General specifications of the IT FR14 panel

Panel made of galvanised steel tubes. Upper and lower crossbeams and welded vertical bars.

It can be manufactured with bars that pass through the crossbeam. Posts made of galvanised tube with bracket clamp for recessing or with base plate for screwing. Fixing system with polyamide piece. Simultaneous installation which is carried out by placing the post followed by the panel and the next post.

Surface finishing



IT PINT

Steel + galvanising + plasticising

IT PINT PLUS

Steel + Sendzmir galvanising + primer + plasticising


IT PINT ULTRA

Steel + hot-dip galvanising + primer + plasticising



Standard RAL


Example of special textured RAL colors

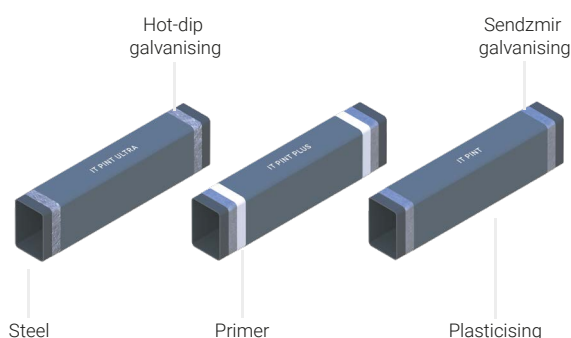


All finishes have a nanotechnological passivation layer between the steel and the primer or plasticiser.

Any colour from the RAL chart.





Technical information of the IT FR14 30.20 panel

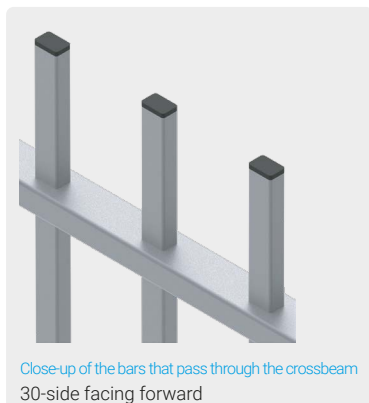




Technical information

Upper crossbeam: 50 x 30 x 2 mm

Lower crossbeam: 50 x 30 x 2 mm

Pillars: 60 x 60 x 2 / Ø 60 x 2 mm

Bars: 30 x 20 x 1,5 mm

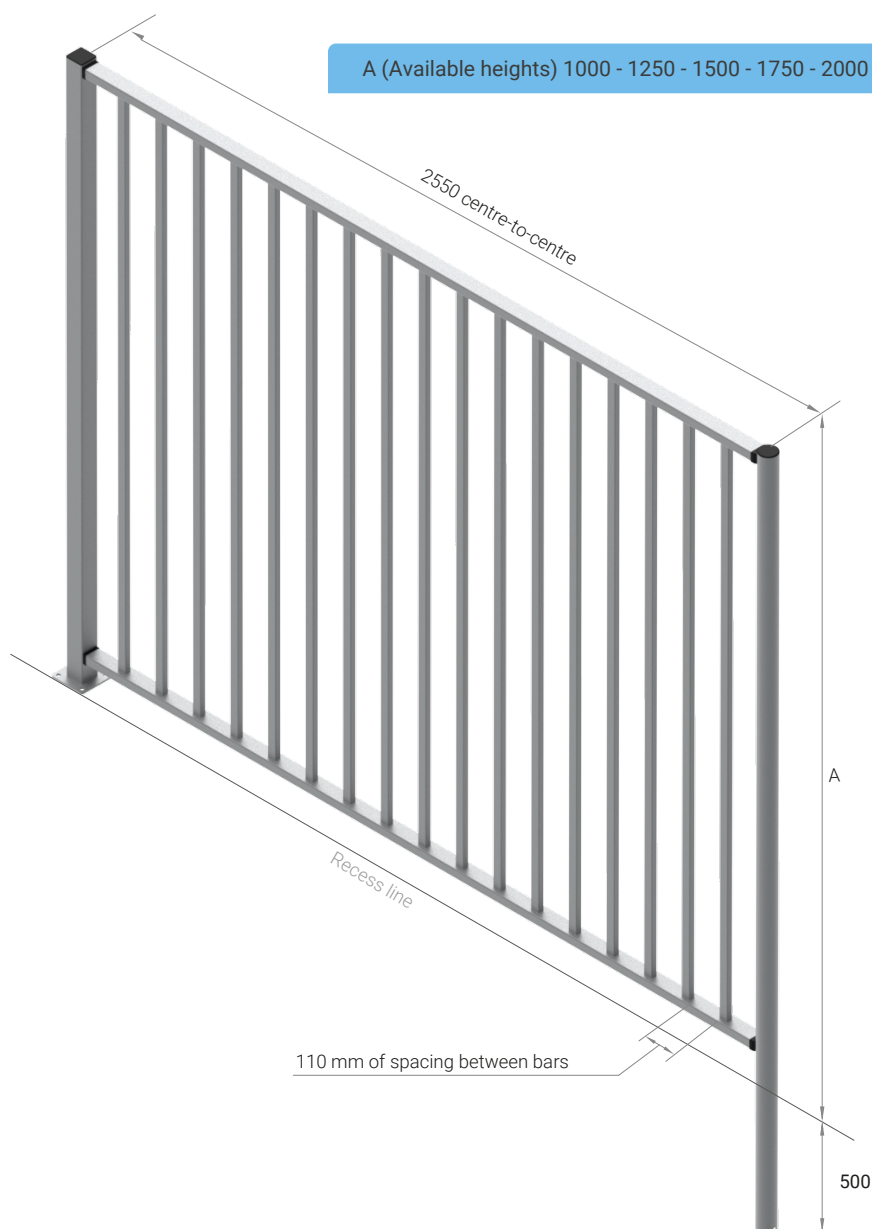

Fixing of the Ø60 x 2.0 mm post
P-R 50 x 30

Fixing of the 60 x 60 x 2.0 mm post
P 50 x 30

Fixing with a fixing boss
to facilitate the panel replacement
P 50 x 30

Fixing with a fixing boss
to facilitate the panel replacement
P-R 50 x 30

