



IT 200 gate

Electro-welded mesh gate

IT 200 single and double leaf swing gate, ideal for all types of fencing. An aesthetically pleasing gate and easy to install thanks to LOCINOX accessories. Highly versatile for any type of project.



Individual properties



Collective properties



Parks and gardens



Industrial areas

Product with quality certification



Indusmetal
SISTEMA DE
GESTIÓN
ISO 9001:2015

General specifications of the IT 200 gate

Gate made of galvanised tube, with vertical uprights for 40 x 40 x 1.5 mm, horizontal crossbeams for 40 x 30 x 1.5 mm and 200 x 50 x 5 mm electro-welded mesh. Pillars of 60 x 60 mm, 80 x 80 mm or 100 x 100 mm depending on dimensions, for recessing or with plate. LOCINOX lock, striker and hinges.

Surface finishing



IT PINT
Steel + galvanising + plasticising

IT PINT PLUS
Steel + Sendzmir galvanising + primer + plasticising


IT PINT ULTRA
Steel + hot-dip galvanising + primer + plasticising



Standard RAL



Example of special textured RAL colors

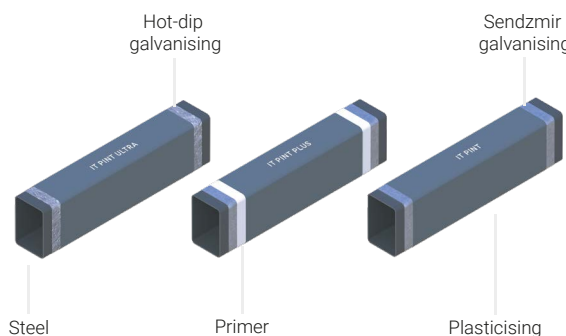


All finishes have a nanotechnological passivation layer between the steel and the primer or plasticiser.

Any colour from the RAL chart.





Technical specifications of the IT 200 single-leaf gate

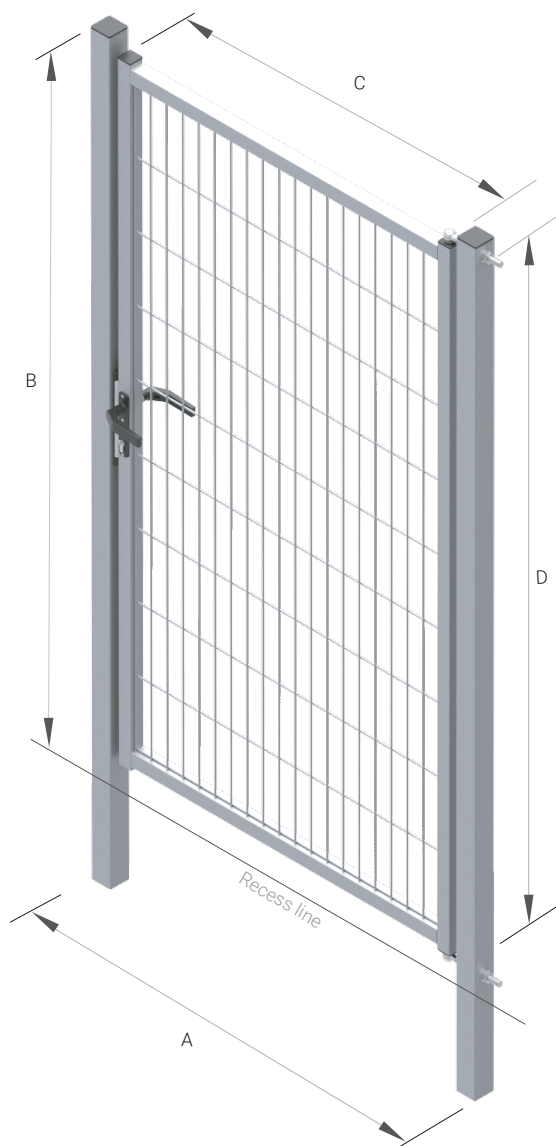

Available widths for the IT 200 gates (single-leaf)

	1000	1500	
Pillars	60 x 60	60 x 60	80 x 80
Total width (A)	1200	1700	1740
Leaf width (C)	1035	1535	

Pillars for the IT 200 gates (single-leaf)


Width	Height				
	1000	1200	1500	1700	2000
1000	60 x 60	60 x 60	60 x 60	60 x 60	60 x 60
1500	60 x 60	60 x 60	80 x 80	80 x 80	80 x 80

Available heights for the IT 200 gates (single and double leaf)

	1000	1200	1500	1700	2000
Total height (B)	1005	1205	1605	1805	2005
Leaf height (D)	905	1105	1505	1705	1905



Lock
LOCINOX PVC lock and striker and Fortyset-401 GP aluminum

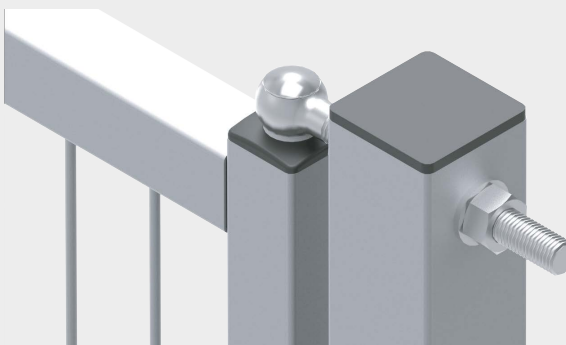

Hinge
Hot-dip galvanised LOCINOX hinge with threaded shaft
GBM16-DP-40-160 garden



Technical specifications of the IT 200 double-leaf gate

Available widths for the IT 200 gates (double-leaf)

	2000	3000		4000		5000	
Pillars	60 x 60	60 x 60	80 x 80	80 x 80	100 x 100	80 x 80	100 x 100
Total width (A)	2265	3265	3305	4305	4345	5305	5345
Leaf width (C)	2085	3085		4085		5085	

Pillars for the IT 200 gates (double-leaf)



Width	Height				
	1000	1200	1500	1700	2000
2000	60 x 60	60 x 60	60 x 60	60 x 60	60 x 60
3000	60 x 60	60 x 60	80 x 80	80 x 80	80 x 80
4000	80 x 80	80 x 80	80 x 80	100 x 100	100 x 100
5000	80 x 80	80 x 80	100 x 100	100 x 100	100 x 100

Pillars with anchor plate are also an option

60 x 60 mm pillar plate: 118 x 118 x 6 mm

80 x 80 mm pillar plate: 160 x 160 x 8 mm

100 x 100 mm pillar plate: 180 x 180 x 10 mm

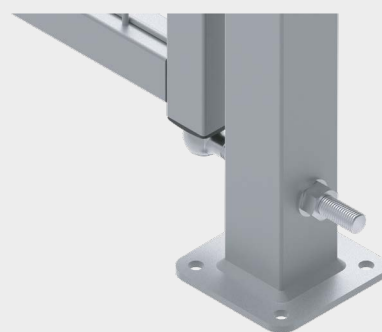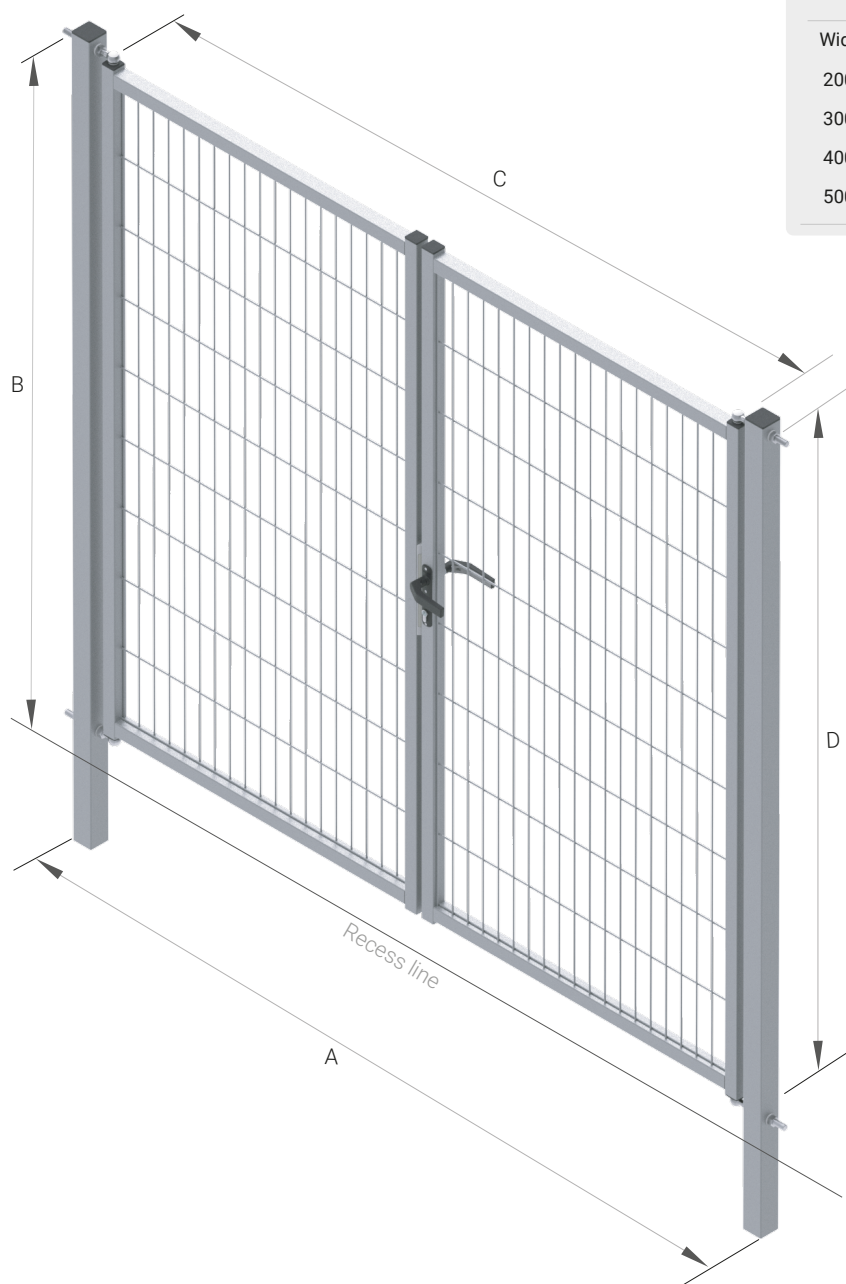

Pillars with plate
Close-up of the pillars with welded plate